

AN 130 2D

for unrebated residential doors with 21 mm reduced hinge frame part up to 20 kg



Product features

- reduced hinge frame part 21 mm
- completely concealed hinge system
- for timber frames
- for unrebated residential doors
- 2D adjustable (height +/- 1,5 mm, compression +/- 1,0 mm)
- material zamak / IXEF

Technical details

Attributes	Value
Load capacity	20,0 kg
Overall length	110,0 mm
Width (door part)	24,0 mm
Width (frame part)	24,0 mm
Cutter diameter	14,0 or 16,0 mm
Collar ring diameter	25,0 or 27,0 mm
Opening angle	180°


Note

The load capacity mentioned above refers to the use of 2 hinges

Quality marks



Certification UL

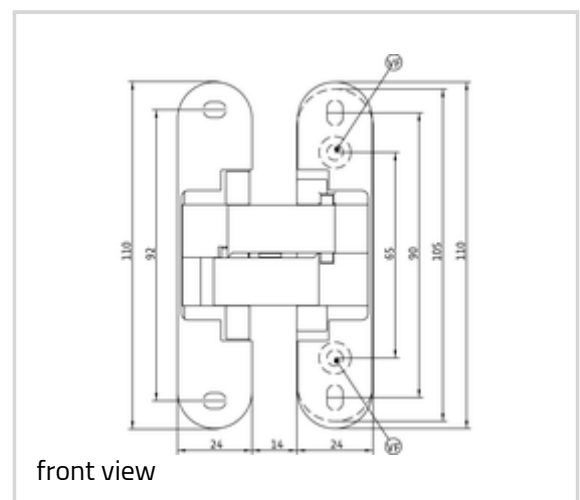

Anselmi - AN 130 2D

per door leaf (900 x 2100 mm).

Suggested screws:

Frame side: Countersunk head screw DIN 7505 A, Diameter 4,5 mm

Door side: Countersunk head screw DIN 7505 A, Diameter 4,5 mm

If necessary, it is possible to lock the vertical adjustment of the hinge by means of a vertical adjustment fixing screw (VF).

Combinations

AN 140 3D FZ

Item

Finish(es)	AN 014-Satin Chrome
OF-NR.	014
VPE	pack of 2
DIN	DIN right and left hand
EAN	8054608704022

Finish(es)	AN 018-Black
OF-NR.	018
VPE	pack of 2
DIN	DIN right and left hand
EAN	8054608704060

Finish(es)	AN 049-RAL 9016 Traffic White
OF-NR.	049
VPE	pack of 2
DIN	DIN right and left hand
EAN	8054608704039

